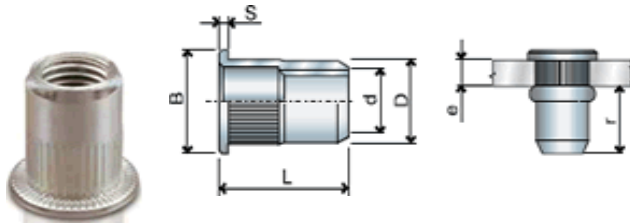






FTT - INOX / A2

Inserti filettati in acciaio inox a testa cilindrica



d	e	r (min÷max)	mm	D	B	S	L	 Kgf	 N	 Kgm	 Nm
M3 FTT/C	0,3 ÷ 1						8,5				
		5,5 ÷ 5,8	5	4,9	7	0,8		387	3800	0,15	1,5
M3 FTT/L	2 ÷ 3						10,5				
M4 FTT/C	0,3 ÷ 2,5						11				
		5,5 ÷ 6	6	5,9	9	1		632	6200	0,7	7
M4 FTT/L	2,5 ÷ 4						13				
M5 FTT/C	0,5 ÷ 3						13				
		7,2 ÷ 7,7	7	6,9	10	1,2		1279	12550	1,4	14
M5 FTT/L	3 ÷ 5						15,5				
M6 FTT/C	0,5 ÷ 3						14,5				
		7,6 ÷ 8,2	9	8,9	12	1,5		2339	22950	2,2	22
M6 FTT/L	3 ÷ 5,5						17,5				
M8 FTT/C	0,8 ÷ 3,5						17,5				
		9,5 ÷ 10,1	11	10,9	15	1,5		3257	31950	3,2	32
M8 FTT/L	3,5 ÷ 6						20				
M10 FTT/C	1 ÷ 3,5						21				
		13 ÷ 14	13	12,9	17	1,7		4057	39800	5,4	54
M10 FTT/L	3,5 ÷ 6						24				