


**DIN 7 / A4**

**Spine cilindriche**

tipo A tolleranza m 6

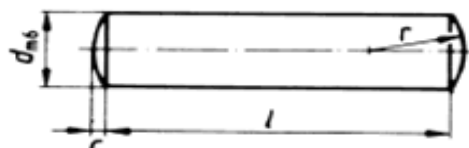


ISO 2338

d	1	1,5	2	2,5	3	4	5	6
l / mm								
3	●	●						
4	●	●	●	●	●			
5	●	●	●	●	●	●	●	
6	●	●	●	●	●	●	●	●
8	●	●	●	●	●	●	●	●
10	●	●	●	●	●	●	●	●
12	●	●	●	●	●	●	●	●
14	●	●	●	●	●	●	●	●
16	●	●	●	●	●	●	●	●
18			●	●	●	●	●	●
20			●	●	●	●	●	●
24			●	●	●	●	●	●
28				●	●	●	●	●
30						●		
32			●	●	●	●	●	●
36					●	●	●	●
40					●	●	●	●
45							●	●
50						●	●	●
55								●
60							●	●
70								●
<b>CONFEZIONE</b>	<b>500</b>	<b>500</b>	<b>500</b>	<b>500</b>	<b>200</b>	<b>200</b>	<b>100</b>	<b>100</b>
<i>c</i>	<i>0,15</i>	<i>0,23</i>	<i>0,3</i>	<i>0,4</i>	<i>0,45</i>	<i>0,6</i>	<i>0,75</i>	<i>0,9</i>
<i>r</i>	<i>1</i>	<i>1,5</i>	<i>2</i>	<i>2,5</i>	<i>3</i>	<i>4</i>	<i>5</i>	<i>6</i>

## Spine cilindriche

tipo A tolleranza m 6

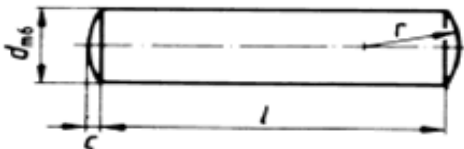

ISO 2338

d	8	10	12	16	20
l / mm					
8	●				
10	●				
12	●	●	●		
14	●	●	●		
16	●	●	●	●	
18	●	●	●	●	
20	●	●	●	●	●
24	●	●	●	●	●
28	●	●	●	●	●
32	●	●	●	●	●
36	●	●	●	●	●
40	●	●	●	●	●
45	●	●	●	●	●
50	●	●	●	●	●
55	●	●	●	●	●
60	●	●	●	●	●
70	●	●	●	●	●
80	●	●	●	●	●
90		●	●	●	●
100		●	●	●	●
<b>CONFEZIONE</b>	<b>100</b>	<b>50</b>	<b>25</b>	<b>25</b>	<b>10</b>
<i>c</i>	<i>1,2</i>	<i>1,5</i>	<i>1,8</i>	<i>2,5</i>	<i>3</i>
<i>r</i>	<i>8</i>	<i>10</i>	<i>12</i>	<i>16</i>	<i>20</i>