


DIN 1476 / 1.4303

Ribattini a testa tonda intagliati

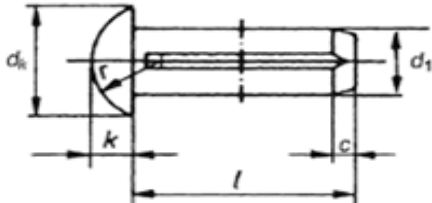

ISO 8746

	d1	2	2,5	3	4	5
<i>l</i> / mm						
4						
5		●		●		
6		●	●	●		
8				●	●	●
10				●		
12					●	
18					●	
CONFEZIONE		500	500	500	200	200
<i>dk max</i>		3,7	4,6	5,45	7,25	9,1
<i>k max</i>		1,3	1,6	1,95	2,55	3,15
<i>c</i>		0,6	0,75	0,9	1,2	1,5
<i>r</i>		1,9	2,4	2,8	3,8	4,6