


**DIN 6912 / A4**

**Viti a testa cilindrica con esagono incassato ribassate**




d	M 3*	M 4	M 5	M 6	M 8	M 10	M 12
l / mm							
6		●					
8	●	●	●	●			
10	●	●	●	●	●		
12	●	●	●	●	●		
14				●			
16	●	●	●	●	●	●	●
18				●			
20	●	●	●	●	●	●	●
25		●	●	●	●	●	●
30		●	●	●	●	●	●
35		●	●	●	●	●	●
40		●	●	●	●	●	●
45			●	●	●	●	●
50		●	●	●	●	●	●
55				●	●	●	●
60			●	●	●	●	●
65				●	●	●	●
70				●	●	●	●
75					●		
80				●	●	●	●
90					●	●	●
100				●	●	●	●
120				●	●		

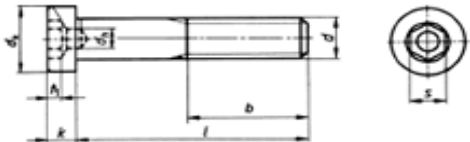

**DIN 6912 / A4**

**Viti a testa cilindrica con esagono incassato ribassate**

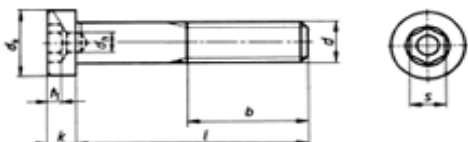

d	M 14	M 16	M 18	M 20	M 24
l / mm					
25	●	●			
30	●	●			
35	●	●	●	●	
40	●	●	●	●	
45	●	●	●	●	
50	●	●	●	●	●
55	●	●	●	●	●
60	●	●	●	●	●
65	●	●	●	●	●
70	●	●	●	●	●
80	●	●	●	●	●
90	●	●	●	●	●
100	●	●	●	●	●
110	●	●	●	●	●
120	●	●	●	●	●
130	●	●	●	●	●
140	●	●	●	●	●
150	●	●	●	●	●
<b>CONFEZIONE</b>	<b>50</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>10</b>
	≤ 110				
	25				
	>110				
<i>b</i>	34	38	42	46	54
<i>dk max</i>	20,67	23,67	27	30	36
<i>dh min</i>	7	8	8	10	12
<i>k max</i>	8,5	10	11	12	14
<i>t1 min</i>	4,35	5,35	5,85	6,32	7,18
<i>s</i>	12	14	14	17	19