


DIN 7983 C - TX / A2

Viti autofilettanti testa svasata con calotta esalobate tipo C

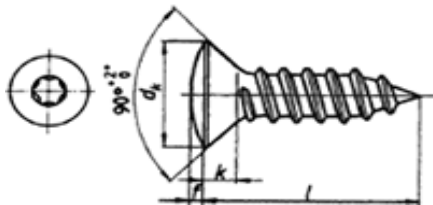

ISO 7051

d	2,9	3,5	3,9	4,2	4,8	5,5	6,3
l / mm (Zoll)							
6,5 (1/4")	●	●	●				
9,5 (3/8")	●	●	●	●	●		
13 (1/2")	●	●	●	●	●	●	●
16 (5/8")	●	●	●	●	●	●	●
19 (3/4")	●	●	●	●	●	●	●
22 (7/8")	●	●	●	●	●	●	●
25 (1")	●	●	●	●	●	●	●
32 (1 1/4")	●	●	●	●	●	●	●
38 (1 1/2")		●	●	●	●	●	●
45 (1 3/4")		●	●	●	●	●	●
50 (2")		●	●	●	●	●	●
60 (2 3/8")					●	●	●
70 (2 3/4")					●	●	●
80 (3 3/8")					●	●	●
CONFEZIONE	1000	1000	1000	1000	1000	1000	500
		≤ 45	≤ 38	≤ 32	≤ 25	≤ 25	≤ 25
		500	500	500	500	500	200
		>45	>38	≤ 50	≤ 45	≤ 45	>25
				200	200	200	
				>50	>45	>45	
k ~	1,7	2,1	2,3	2,5	3	3,4	3,8
dk max	5,5	6,8	7,5	8,1	9,5	10,8	12,4
f ~	0,9	1,2	1,3	1,4	1,5	1,7	2
dimensione chiave	TX 8	TX 10	TX 15	TX 20	TX 25	TX 25	TX 30