


DIN 7983 C - H / A4

**Viti autofilettanti testa svasata con calotta
taglio croce tipo H - Philips**

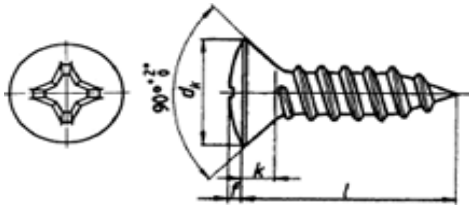

ISO 7051

| d | 2,2 | 2,9 | 3,5 | 3,9 | 4,2 | 4,8 | 5,5 | 6,3 |
|-------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|
| | No. 2 | No. 4 | No. 6 | No. 7 | No. 8 | No. 10 | No. 12 | No. 14 |
| l / mm (Pollici) | | | | | | | | |
| 6,5 (1/4") | ● | ● | ● | ● | | | | |
| 9,5 (3/8") | ● | ● | ● | ● | ● | ● | | |
| 13 (1/2") | ● | ● | ● | ● | ● | ● | ● | ● |
| 16 (5/8") | ● | ● | ● | ● | ● | ● | ● | ● |
| 19 (3/4") | ● | ● | ● | ● | ● | ● | ● | ● |
| 22 (7/8") | ● | ● | ● | ● | ● | ● | ● | ● |
| 25 (1") | ● | ● | ● | ● | ● | ● | ● | ● |
| 32 (1 1/4") | | ● | ● | ● | ● | ● | ● | ● |
| 38 (1 1/2") | | | ● | ● | ● | ● | ● | ● |
| 45 (1 3/4") | | | | ● | ● | ● | ● | ● |
| 50 (2") | | | | ● | ● | ● | ● | ● |
| 60 (2 3/8") | | | | | ● | ● | ● | ● |
| 70 (2 3/4") | | | | | ● | ● | ● | ● |
| 80 (3 3/8") | | | | | | ● | ● | ● |
| 90 (3 1/2") | | | | | | ● | ● | ● |
| 100 (4") | | | | | | ● | ● | ● |
| | | | | | | | | |
| | | | | | | | | |
| CONFEZIONE | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 |
| | | | | ≤ 38 | ≤ 32 | ≤ 25 | ≤ 25 | ≤ 25 |
| | | | | 500 | 500 | 500 | 500 | 200 |
| | | | | >38 | ≤ 50 | ≤ 45 | ≤ 45 | >25 |
| | | | | | 200 | 200 | 200 | |
| | | | | | >50 | >45 | >45 | |
| k ~ | 1,3 | 1,7 | 2,1 | 2,3 | 2,5 | 3 | 3,4 | 3,8 |
| dk max | 4,3 | 5,5 | 6,8 | 7,5 | 8,1 | 9,5 | 10,8 | 12,4 |
| f ~ | 0,7 | 0,9 | 1,2 | 1,3 | 1,4 | 1,5 | 1,7 | 2 |