


**DIN 916 / A4**

**Viti senza testa con cava esagonale e punta a coppa**

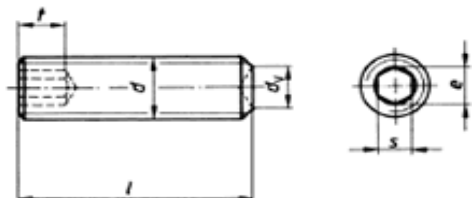

ISO 4029

d	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
l / mm									
4	●	●							
5	●	●	●						
6	●	●	●	●					
8	●	●	●	●	●				
10	●	●	●	●	●	●	●		
12	●	●	●	●	●	●	●		
14			●	●					
16	●	●	●	●	●	●	●	●	
20	●	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●	●
35			●	●	●	●	●	●	●
40			●	●	●	●	●	●	●
45				●	●	●	●	●	●
50				●	●	●	●	●	●
60				●	●	●	●	●	●
70							●	●	●
80							●	●	●
90							●	●	●
100								●	●
<b>CONFEZIONE</b>	<b>500</b>	<b>500</b>	<b>500</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>100</b>	<b>50</b>	<b>50</b>
	≤ 30	≤ 30	≤ 25			≤ 25	≤ 70	≤ 80	≤ 70
	<b>200</b>	<b>200</b>	<b>200</b>			<b>100</b>	<b>50</b>	<b>25</b>	<b>25</b>
	>30	>30	>25			>25	>70	>80	>70
<i>dv max</i>	1,4	2	2,5	3	5	6	8	10	14
<i>t min</i>	1,2	1,5	2	2	3	4	4,8	6,4	8
<i>e min</i>	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
<i>s</i>	1,5	2	2,5	3	4	5	6	8	10