

DIN 912 / A4 - 80

Viti testa cilindrica con esagono incassato




ISO 4762

d	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 20	M 24
l / mm										
8	●	●	●							
10	●	●	●	●						
12	●	●	●	●						
14				●						
16	●	●	●	●	●	●				
18		●		●						
20	●	●	●	●	●	●	●	●		
22		●		●						
25	●	●	●	●	●	●	●	●		
30	●	●	●	●	●	●	●	●	●	
35		●	●	●	●	●	●	●	●	
40		●	●	●	●	●	●	●	●	
45		●	●	●	●	●	●	●	●	●
50		●	●	●	●	●	●	●	●	●
55			●	●	●	●	●			
60			●	●	●	●	●	●	●	●
65			●	●	●	●	●			
70			●	●	●	●	●	●	●	●
75					●	●				
80			●	●	●	●		●	●	●
90			●	●	●	●		●	●	●
100			●	●	●	●		●	●	●
110				●	●	●			●	
120			●	●	●	●			●	
130			●	●	●	●				
140			●	●	●	●				
150				●	●	●				
160				●	●	●				
170				●	●	●				
180				●		●				

DIN 912 / A4 - 80

Viti testa cilindrica con esagono incassato

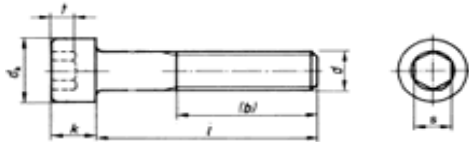

ISO 4762

d	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 20	M 24
l / mm										
CONFEZIONE	1000	500	500	500	100	50	50	25	25	10
	≤ 20	≤ 25	≤ 16	≤ 14	≤ 50	≤ 75				
	500	200	200	200	50	25				
			≤ 45	≤ 25	≤ 170	>75				
			100	100	25					
			>45	≤ 100	>170					
			50							
			≤ 170							
			25							
			>170							
b	20	22	24	28	32	36	40	44	52	60
t min	2	2,5	3	4	5	6	7	8	10	12
s	3	4	5	6	8	10	12	14	17	19
k max	4	5	6	8	10	12	14	16	20	24
dk	7	8,5	10	13	16	18	21	24	30	36