



**Viti testa tonda quadro sotto testa**

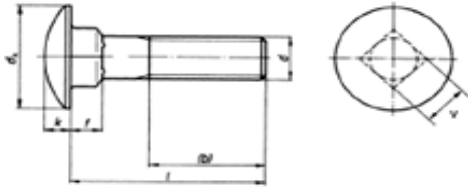

ISO 8677

| d      | M 5 | M 6 | M 8 | M 10 | M 12 | M 16 |
|--------|-----|-----|-----|------|------|------|
| l / mm |     |     |     |      |      |      |
| 12     | ●   | ●   | ●   |      |      |      |
| 16     | ●   | ●   | ●   | ●    |      |      |
| 18     | ●   |     |     |      |      |      |
| 20     | ●   | ●   | ●   | ●    |      |      |
| 25     | ●   | ●   | ●   | ●    | ●    |      |
| 30     | ●   | ●   | ●   | ●    | ●    | ●    |
| 35     | ●   | ●   | ●   | ●    | ●    | ●    |
| 40     | ●   | ●   | ●   | ●    | ●    | ●    |
| 45     | ●   | ●   | ●   | ●    | ●    | ●    |
| 50     | ●   | ●   | ●   | ●    | ●    | ●    |
| 55     | ●   | ●   | ●   | ●    | ●    | ●    |
| 60     | ●   | ●   | ●   | ●    | ●    | ●    |
| 65     | ●   | ●   | ●   | ●    | ●    | ●    |
| 70     | ●   | ●   | ●   | ●    | ●    | ●    |
| 75     | ●   | ●   | ●   | ●    | ●    | ●    |
| 80     | ●   | ●   | ●   | ●    | ●    | ●    |
| 90     | ●   | ●   | ●   | ●    | ●    | ●    |
| 100    | ●   | ●   | ●   | ●    | ●    | ●    |
| 110    | ●   | ●   | ●   | ●    | ●    | ●    |
| 120    |     | ●   | ●   | ●    | ●    | ●    |
| 130    |     | ●   | ●   | ●    | ●    | ●    |
| 140    |     | ●   | ●   | ●    | ●    | ●    |
| 150    |     | ●   | ●   | ●    | ●    | ●    |
| 160    |     |     | ●   | ●    | ●    | ●    |
| 170    |     |     | ●   |      |      |      |
| 180    |     |     | ●   | ●    | ●    | ●    |
| 190    |     |     | ●   |      |      |      |
| 200    |     |     | ●   | ●    | ●    | ●    |
| 220    |     |     |     | ●    | ●    | ●    |
| 240    |     |     |     | ●    | ●    | ●    |
| 260    |     |     |     | ●    | ●    | ●    |
| 280    |     |     |     | ●    | ●    | ●    |
| 300    |     |     |     |      | ●    | ●    |

## Viti testa tonda quadro sotto testa

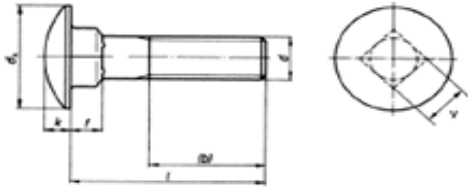

ISO 8677

| d                                   | M 5        | M 6                | M 8                | M 10               | M 12      | M 16      |
|-------------------------------------|------------|--------------------|--------------------|--------------------|-----------|-----------|
| l / mm                              |            |                    |                    |                    |           |           |
| <b>CONFEZIONE</b>                   | <b>200</b> | <b>200</b><br>≤ 50 | <b>100</b><br>≤ 70 | <b>100</b><br>≤ 50 | <b>50</b> | <b>25</b> |
|                                     |            | <b>100</b><br>>50  | <b>50</b><br>>70   | <b>50</b><br>>50   |           |           |
|                                     |            |                    |                    |                    |           |           |
| <i>b per l - 125 mm</i>             | 16         | 18                 | 22                 | 26                 | 30        | 38        |
| <i>b per 125 mm &lt; l - 200 mm</i> | 22         | 24                 | 28                 | 32                 | 36        | 44        |
| <i>f max</i>                        | 4,1        | 4,6                | 5,6                | 6,6                | 8,75      | 12,9      |
| <i>k max</i>                        | 3,3        | 3,88               | 4,88               | 5,38               | 6,95      | 8,95      |
| <i>dk max</i>                       | 13,55      | 16,55              | 20,65              | 24,65              | 30,65     | 38,8      |
| <i>v max</i>                        | 5,48       | 6,48               | 8,58               | 10,58              | 12,7      | 16,7      |
|                                     |            |                    |                    |                    |           |           |