



Viti testa tonda quadro sotto testa

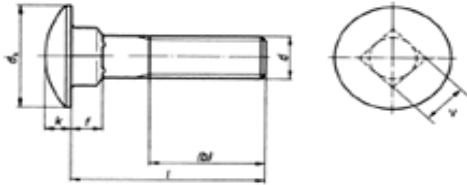

ISO 8677

d	M 5	M 6	M 8	M 10	M 12	M 16
l / mm						
16	●	●	●	●		
20	●	●	●	●		
25	●	●	●	●	●	
30	●	●	●	●	●	●
35	●	●	●	●	●	●
40	●	●	●	●	●	●
45	●	●	●	●	●	●
50	●	●	●	●	●	●
55	●	●	●	●	●	●
60	●	●	●	●	●	●
65	●	●	●	●	●	●
70	●	●	●	●	●	●
75	●	●	●	●	●	●
80	●	●	●	●	●	●
90		●	●	●	●	●
100		●	●	●	●	●
110		●	●	●	●	●
120		●	●	●	●	●
130			●	●	●	●
140			●	●	●	●
150			●	●	●	●

Viti testa tonda quadro sotto testa

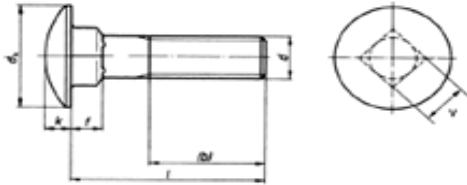

ISO 8677

d	M 5	M 6	M 8	M 10	M 12	M 16
l / mm						
CONFEZIONE	200	200 ≤ 50	100 ≤ 70	100 ≤ 50	50	25
		100 >50	50 >70	50 >50		
<i>b per l - 125 mm</i>	16	18	22	26	30	38
<i>b per 125 mm < l - 200 mm</i>	22	24	28	32	36	44
<i>f max</i>	4,1	4,6	5,6	6,6	8,75	12,9
<i>k max</i>	3,3	3,88	4,88	5,38	6,95	8,95
<i>dk max</i>	13,55	16,55	20,65	24,65	30,65	38,8
<i>v max</i>	5,48	6,48	8,58	10,58	12,7	16,7